

Soccer Field Diagram


***Measurements** are taken from outside to outside of the line.

For information on recommended specifications for lighting, you may contact:
Illuminating Engineering Society of North America
 345 East 47th Street
 New York, NY 10017
 212-248-5000

Dotted line is minimum boundary for spectators, fencing or any objects.

If used on a football field, portable goals should be anchored at least 2 yards in front of the base of the existing football goalposts.

HASH MARK
 (1 yard in length, 6 inches beyond goal line and touch line, and 11 yards from corner located at each corner of field)

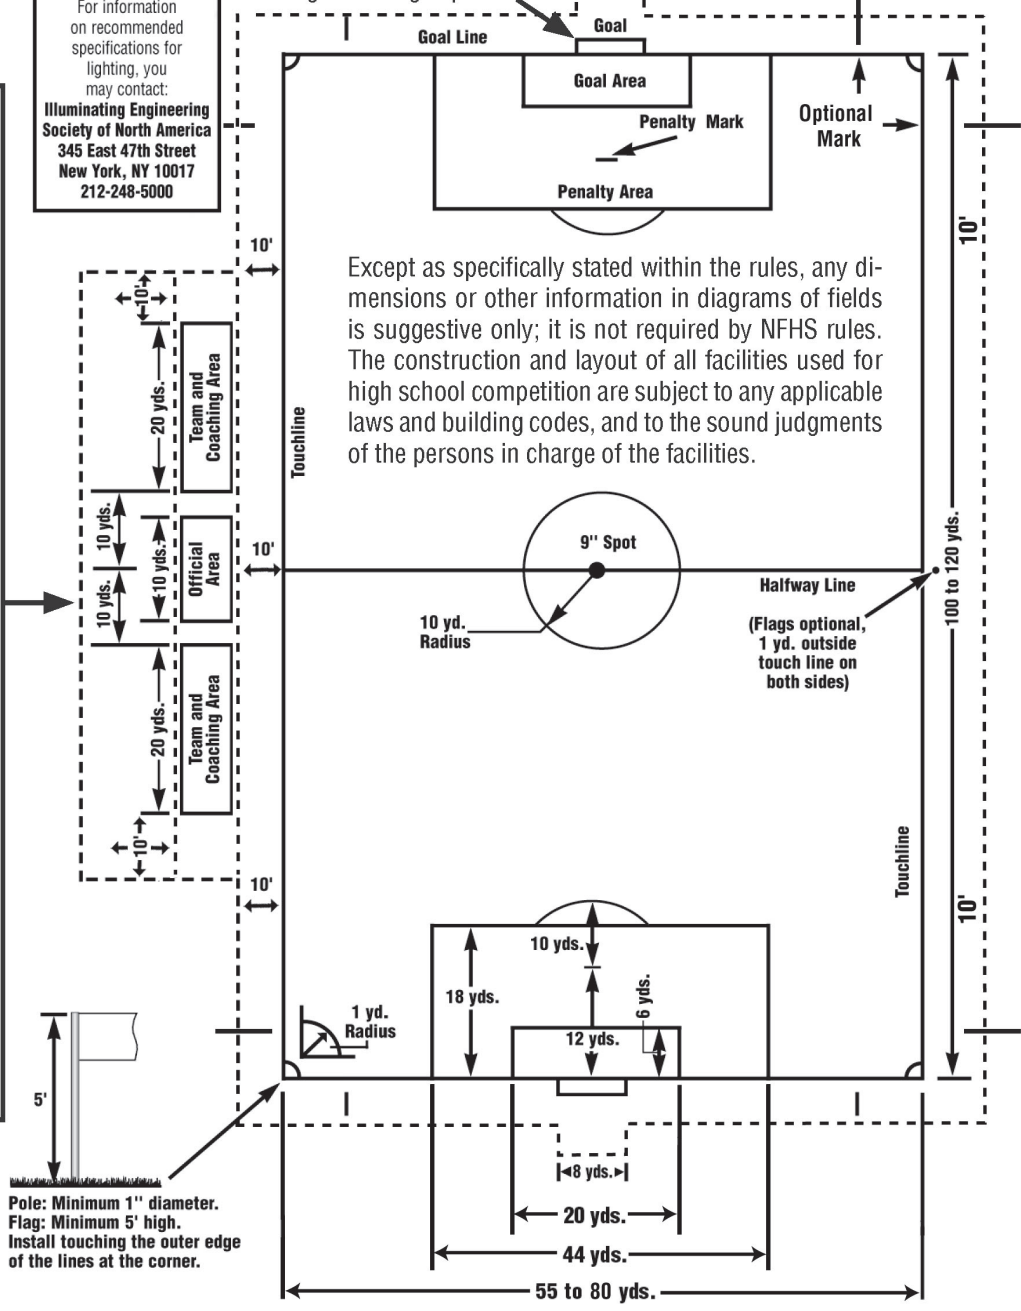

Except as specifically stated within the rules, any dimensions or other information in diagrams of fields is suggestive only; it is not required by NFHS rules. The construction and layout of all facilities used for high school competition are subject to any applicable laws and building codes, and to the sound judgments of the persons in charge of the facilities.

NOTE: An engineered natural turf soccer field should have a minimum of one-and-one-half percent (1.5%) slope for fields which are surface drained. For natural turf fields with a sub-surface drain system the slope should be no less than one (1.0%) percent. For synthetic turf fields with a sub-surface drain system the slope should be no less than one half of one (0.5%) percent. Slope is measured from center to side. For consulting services, contact Design Architects, 816-842-5200.